

Cargo LED Baffles






Our classic baffle now brightens up your space along with dampening noise in modest fashion. Include Cargo LED in a cloud of Cargo Baffles to tackle the trickiest of lighting and acoustic settings.


How to Specify

Step by step instructions on how to specify Cargo LED Baffles.

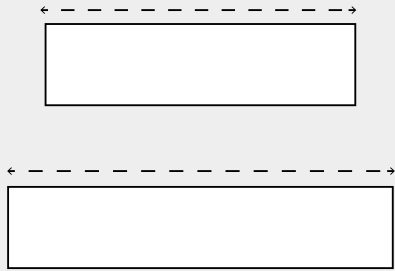


01

Choose baffle length.
(pg 03)

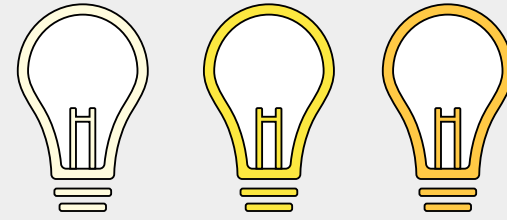


02

Choose lighting colour temperature.
(pg 04)

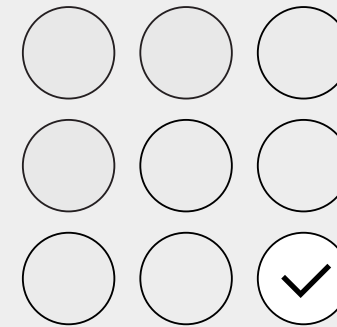

03

Choose baffle colour.
(pg 05-06)

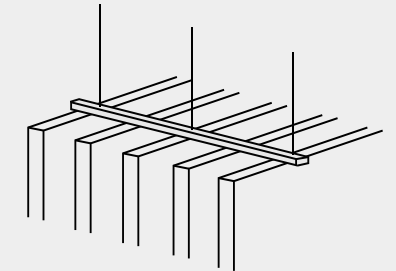

04

Choose installation method.
(pg 07)

Dimensions

Standard Dimensions (mm)

610 L (min.) x 305 H

2440 L (max.) x 305 H

(Size variations come in 305 mm increments due to LED lengths)

Standard Thicknesses (mm)

60, 75



Edge Detail



Box Edge

Customization

Length and Height can be customized to fit your space.

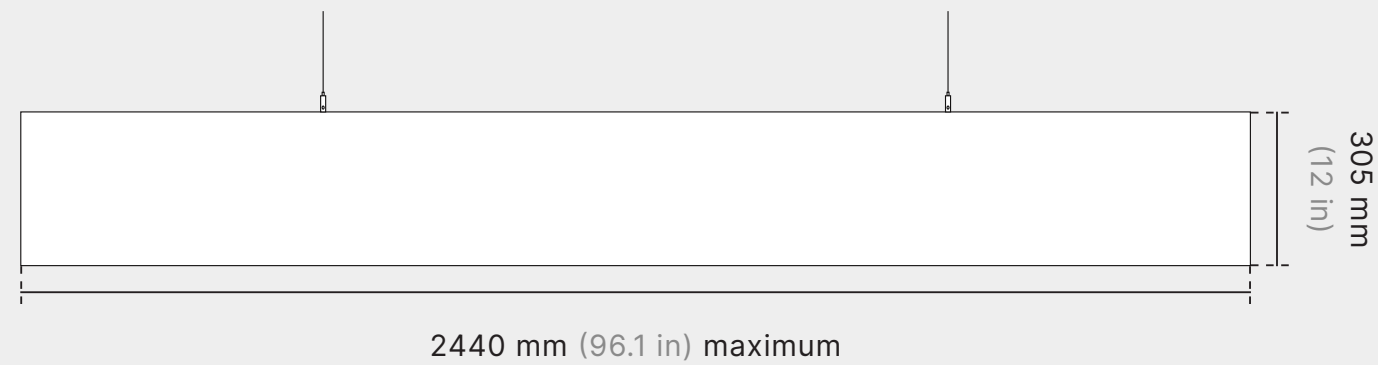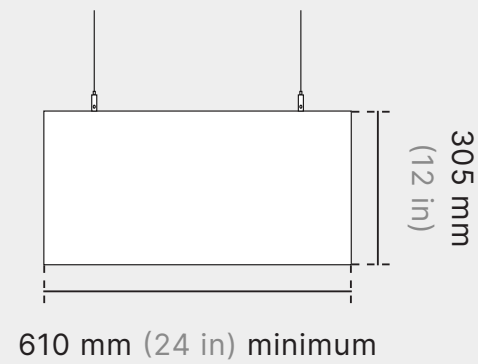

Luminaire Specifications

Voltage

Universal 120-277 VAC

Direct Lumen Output

550 lm/ft, 850 lm/ft

Colour Rendering Index (CRI)

80+

Correlated Colour Temperature (CCT)

3000 K, 3500 K, 4000 K

Nominal Length


2 ft, 3 ft, 4 ft, 5 ft, 6 ft, 7 ft, 8 ft

Dimming

TRIAC, 0-10 V

Safety

UL 1598 approved

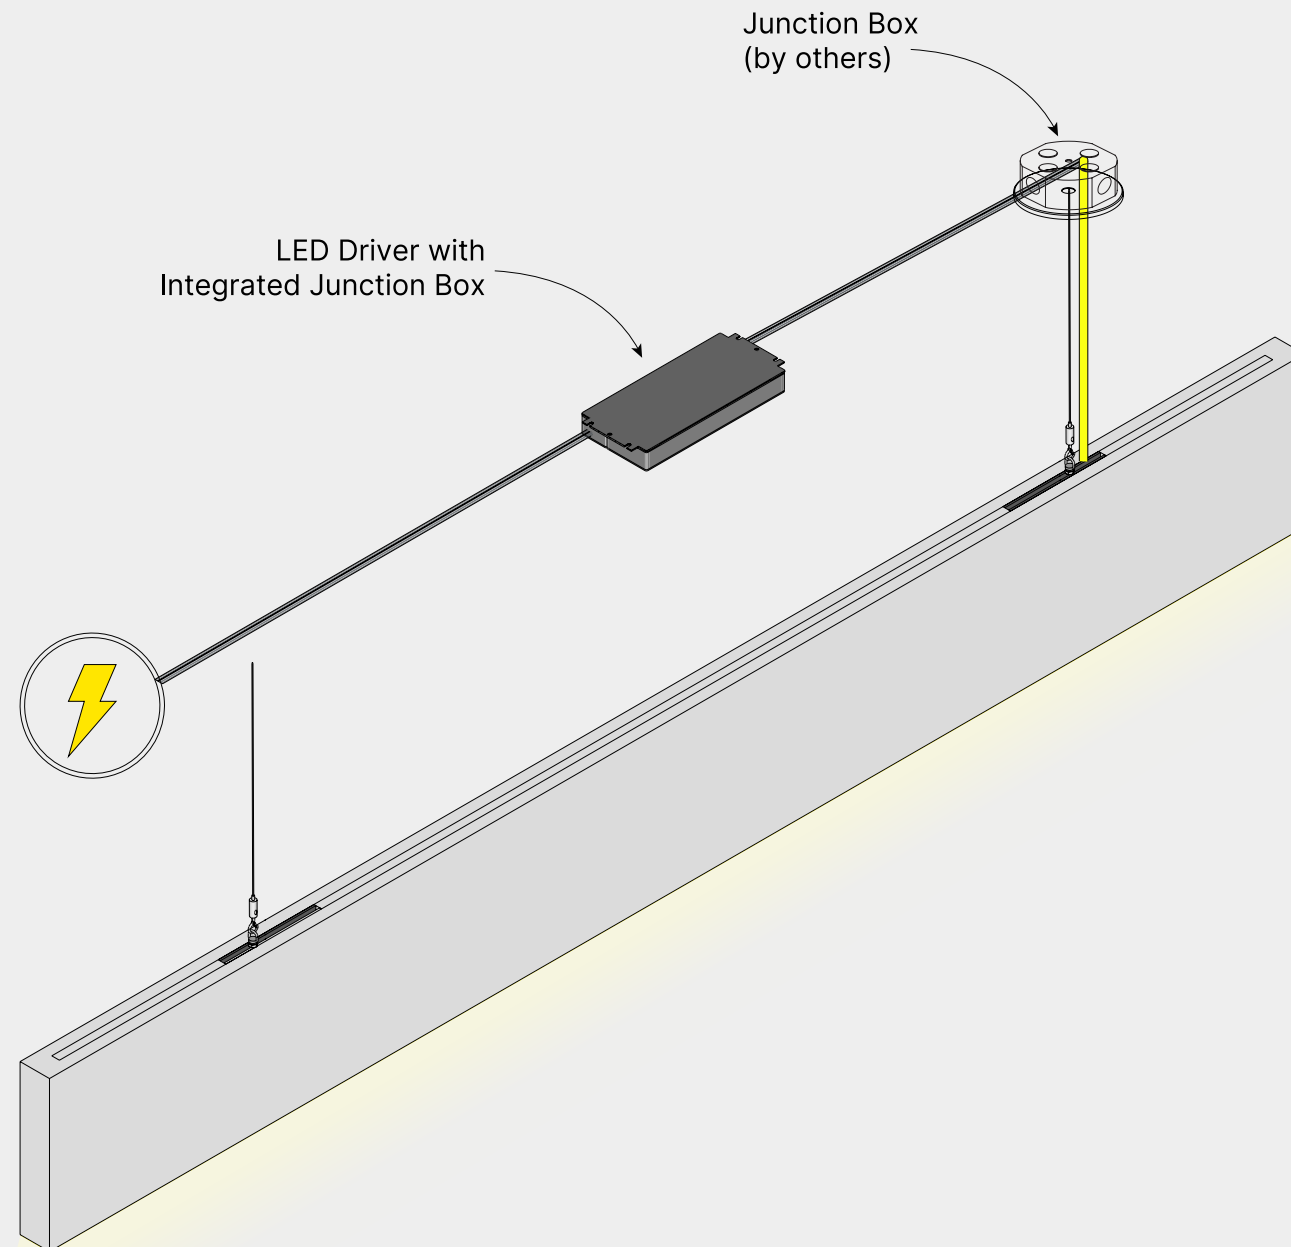

Standard Colours

Choose from any one of our standard colours.



Pure White
SP 07



Urban Grey
SP 79




Pumice
SP 11




Warm Grey
SP 76



Cool Grey
SP 36



Mid Grey
SP 37



Graphite
SP 03



Black
SP 13



Ivory
SP 77




Beige
SP 04




Sandstone
SP 12



Taupe Grey*
SP 90



Castlerock*
SP 80




Blush Pink
SP 81




Plum
SP 72




Red
SP 08




Orange
SP 46



Yam
SP 28




Sunflower
SP 05



Chartreuse
SP 43



Desert Sage
SP 78



Peacock*
SP 82



Mustard*
SP 87



Olive*
SP 88



Moss*
SP 89



Lagoon*
SP 84



Azure*
SP 85



Forest Green
SP 17



Ocean Green*
SP 86




Deep Sea Blue*
SP 83



Krypton
SP 30




Pale Teal
SP 74




Aquamarine
SP 73



Dark Turquoise
SP 71



Sky Blue
SP 25



Navy
SP 01



Midnight Blue
SP 19



Purple
SP 50

Don't see something you love? Ask us about creating your own custom colour.

All colours available in 9, 12, 18, and 24 mm unless noted otherwise.

* 12 mm / 24 mm only

Textures

Create a natural look and feel with printed textures.



White Oak




Silver Oak




Greige Oak




Ebony Oak

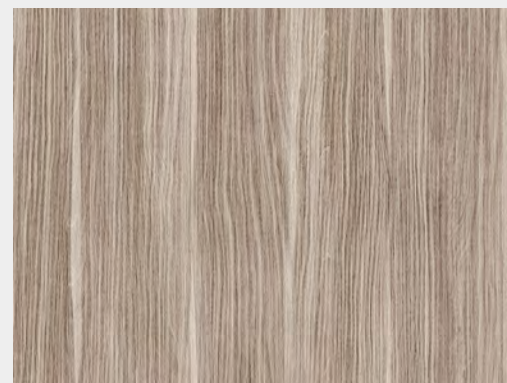


Cafe Oak

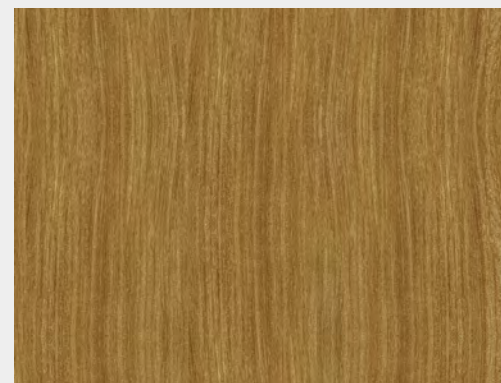

Golden Oak

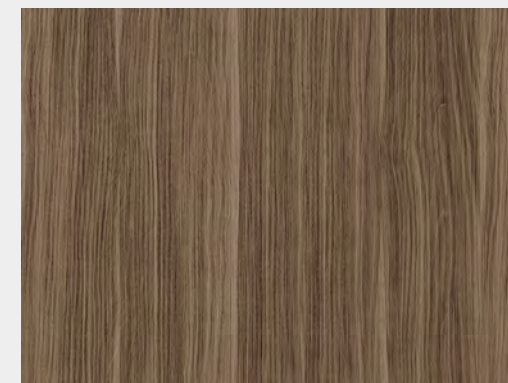

Teak

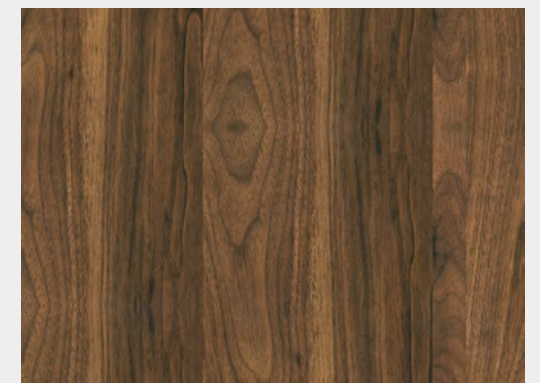


Walnut

Have something you want to print? Talk to us about printing a custom texture, design or image.

Installation

Individual Baffle Suspension Kit

Each baffle is suspended by its own set of aircraft wires.

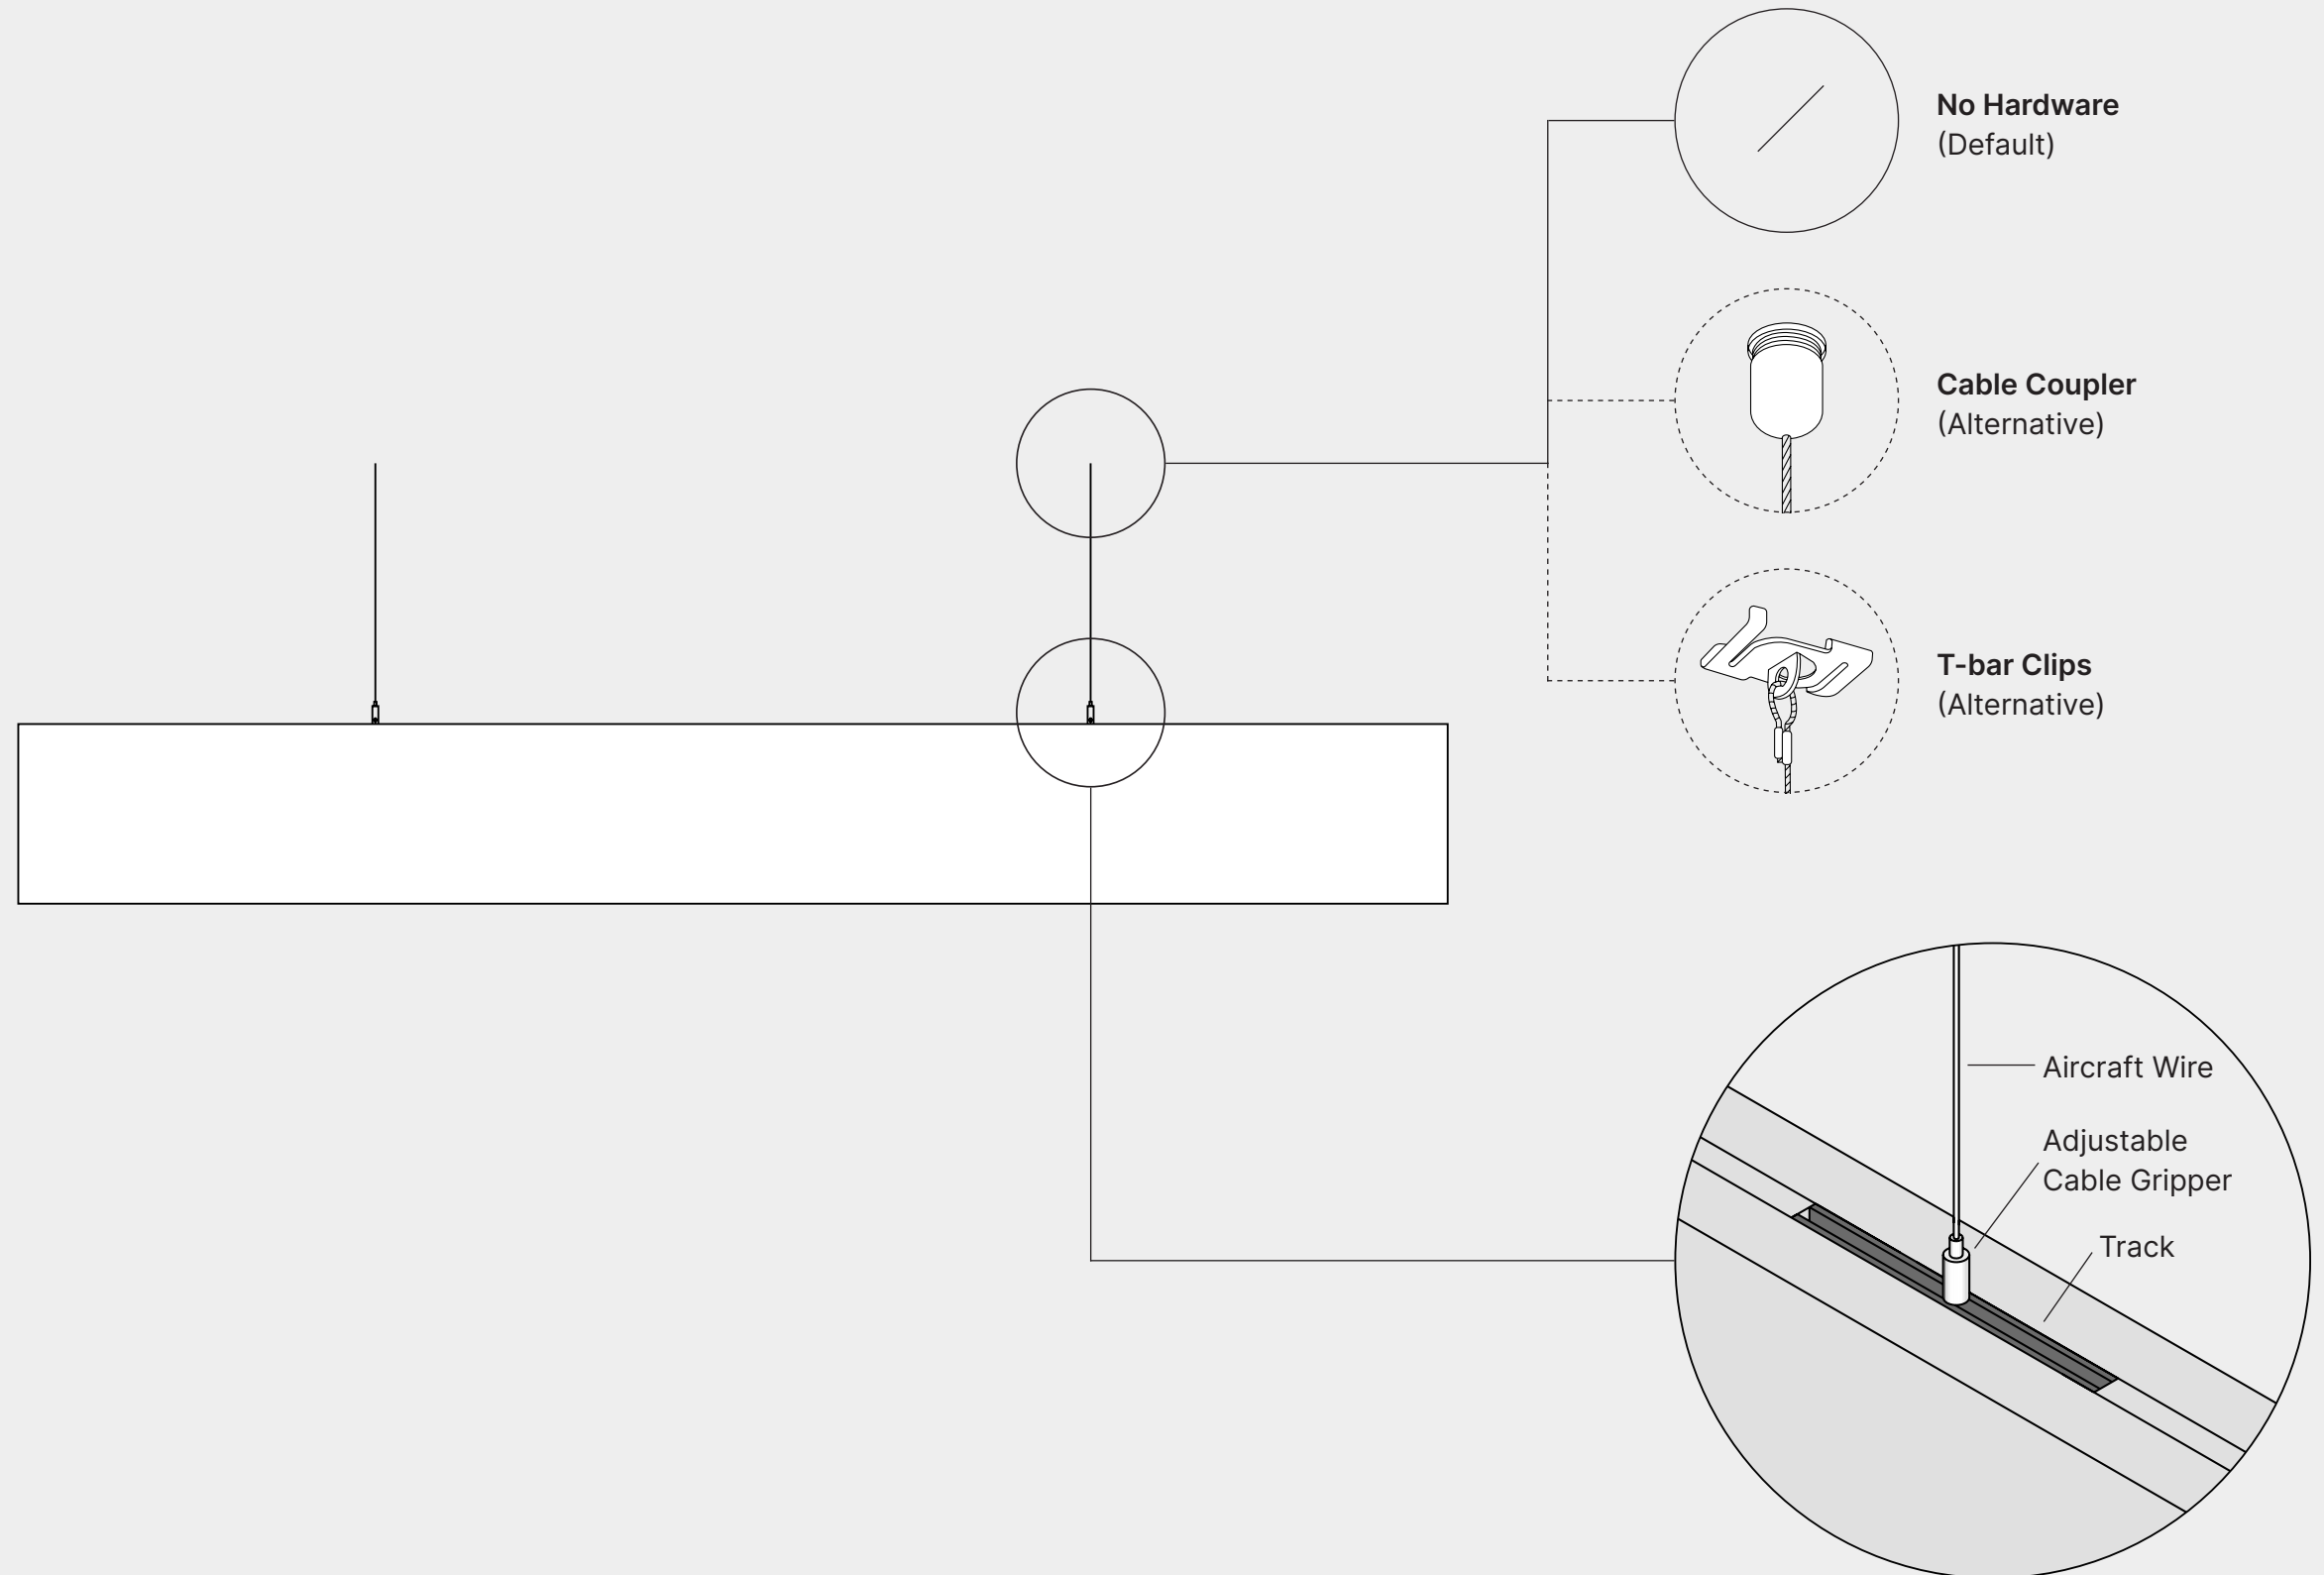

Product Specifications

Cargo LED Baffles

Composition

100% polyester fibre

VOC Emissions

CDPH (CA 01350)

Antimicrobial Testing

Mould & mildew resistant

Fire Rating

- ASTM E84 Class A
- CAN/ULC-S102.2-10

Declare.

Sustainability


- 100% recyclable
- LBC Red List free
- Contributes to LEED certification
- Free of toxic substances and of off-gassing
- Made with ~60% recycled content from plastic water bottles

Colour & Texture Variations

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

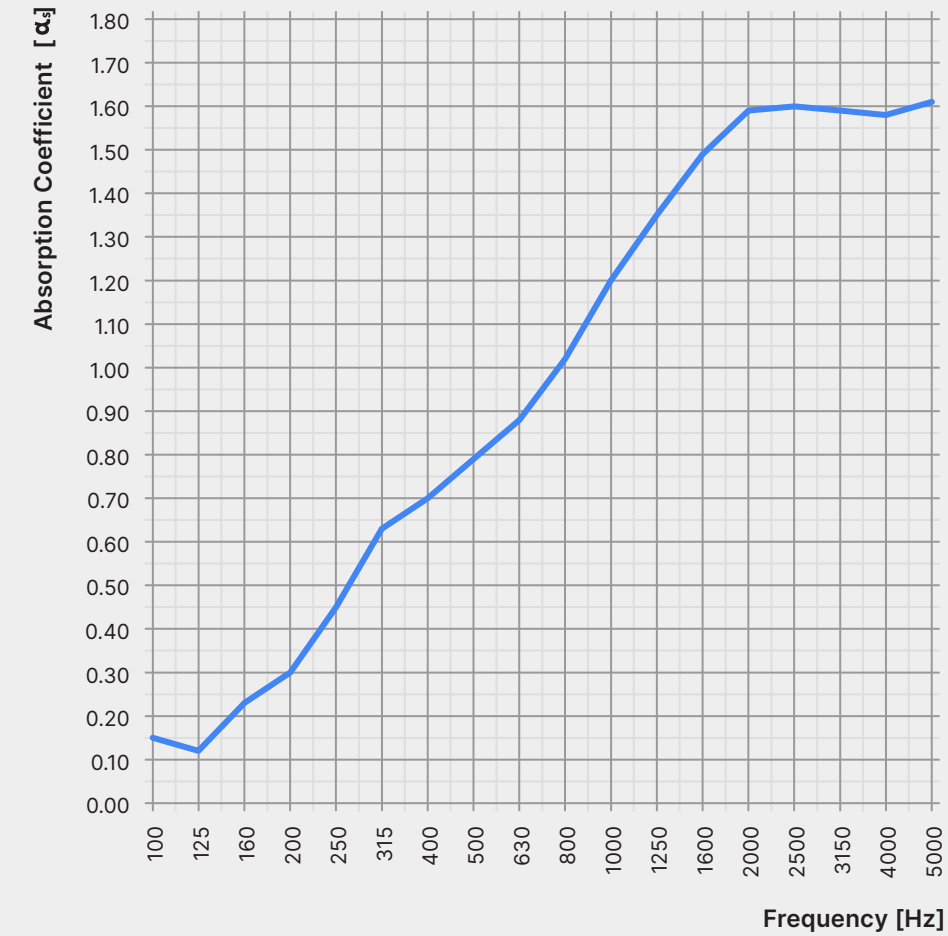

| 200 | 250 | 315 | 400 | 500 | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 | NRC | SAA |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0.30 | 0.45 | 0.63 | 0.70 | 0.79 | 0.88 | 1.02 | 1.20 | 1.35 | 1.49 | 1.59 | 1.60 | 1.00 | 1.00 |

Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.



Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

CARGO LED

BAFFLES

AKUSTUS.COM

