


Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

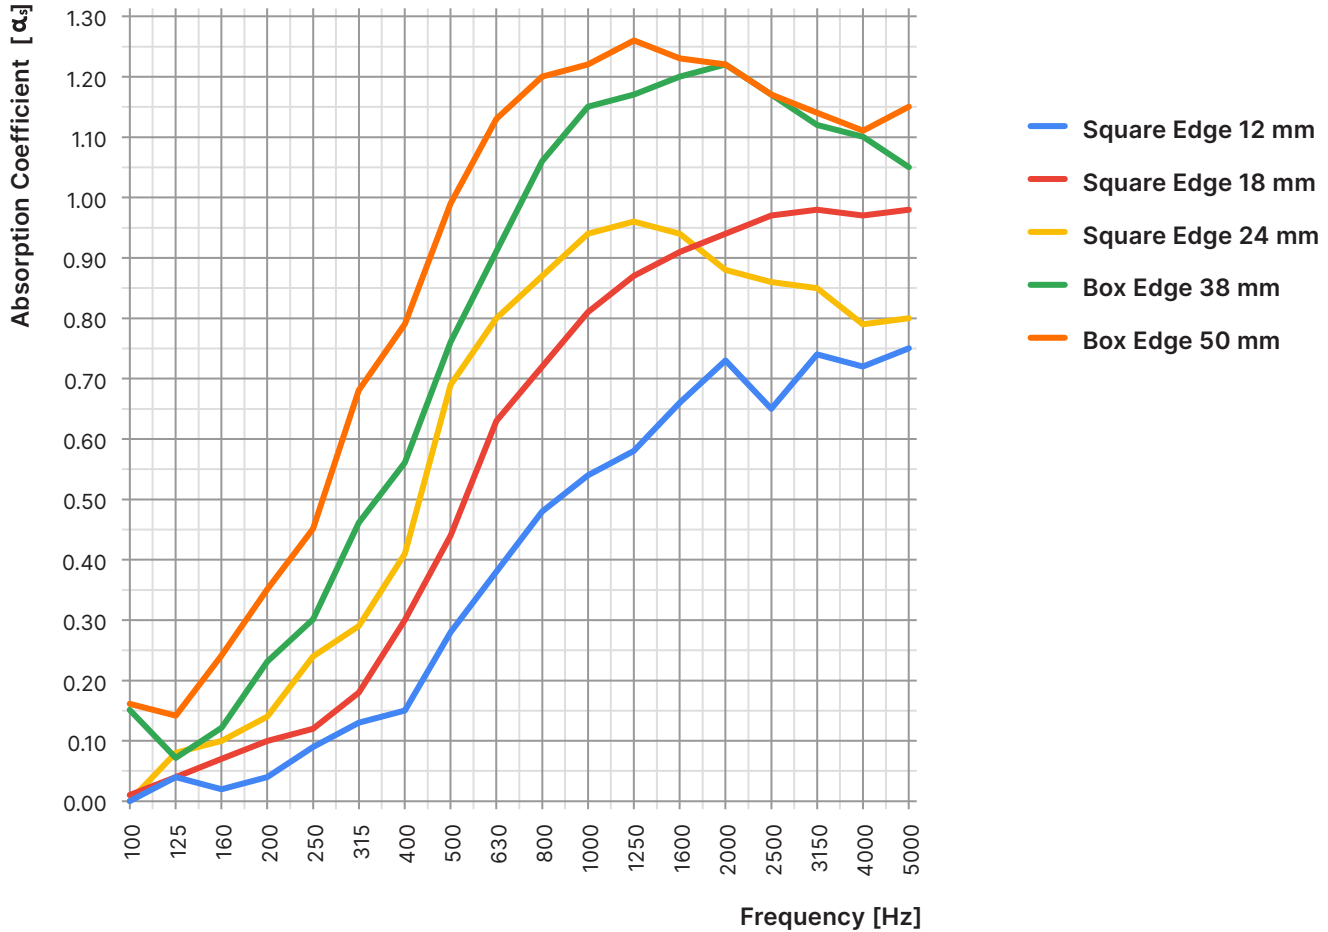

	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	NRC	SAA
Square 12 mm	0.04	0.09	0.13	0.15	0.28	0.38	0.48	0.54	0.58	0.66	0.73	0.65	0.40	0.39
Square 18 mm	0.10	0.12	0.18	0.30	0.44	0.63	0.72	0.81	0.87	0.91	0.94	0.97	0.60	0.58
Square 24 mm	0.14	0.24	0.29	0.41	0.69	0.80	0.87	0.94	0.96	0.94	0.88	0.86	0.70	0.67
Box 38 mm	0.23	0.30	0.46	0.56	0.76	0.91	1.06	1.15	1.17	1.20	1.22	1.17	0.85	0.85
Box 50 mm	0.35	0.45	0.68	0.79	0.99	1.13	1.20	1.22	1.26	1.23	1.22	1.17	0.95	0.97