Forma Floor Dividers



INFO@AKUSTUS.COM





Funky geometry and dramatic colours come together in the Forma Floor Divider series. Each piece utilizes a boxy structure and an eye-catching silhouette to create an unforgettable space.

How to Specify

02

Step by step instructions on how to specify <u>Forma</u> <u>Floor Dividers</u>.






01

Choose panel design and size. (pg 03) 02


Choose colour. (pg 04)





Choose installation method. (pg 05)

(39.4 in)

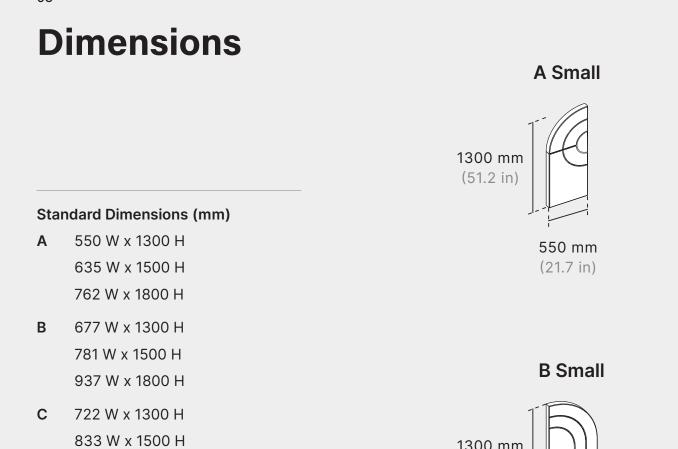



1000 W x 1800 H


75

Edge Detail

Box Edge

Customization

Width and Height can be customized to fit your space.

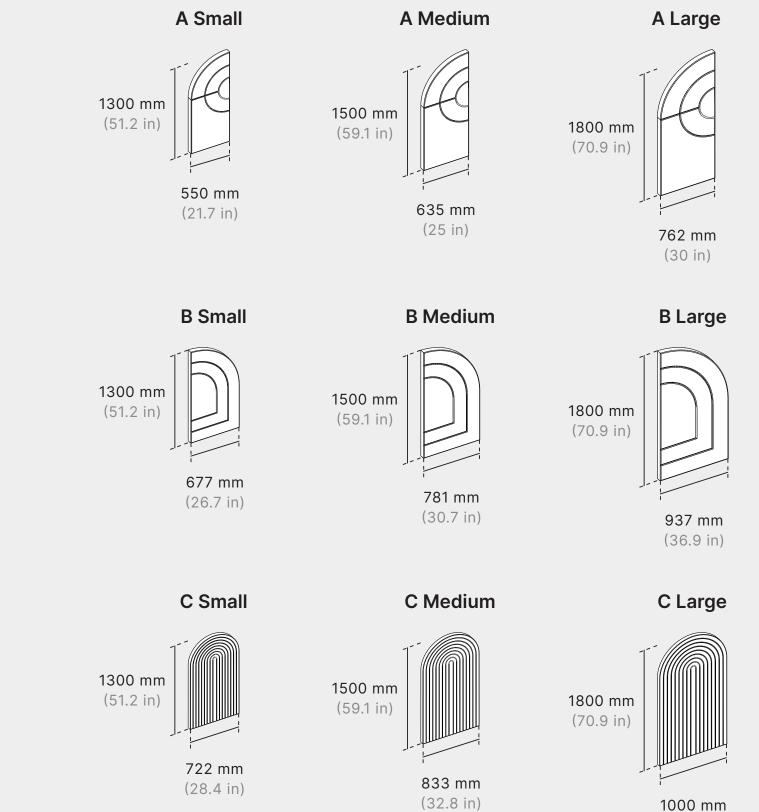



FLOOR DIVIDERS

AKUSTUS.COM

Standard Colours

04

Choose from any one of our standard colours.

Don't see something you love? Ask us about creating your own custom colour.

* Available in 12 / 24 mm only. All other colours available in 9, 12, 18, and 24 mm.

ΛΚUSTUS

SP 07

Pure White

lvory SP 77 Sunflower SP 05

Mustard*

SP 87

Urban Grey

SP 79

Almond

SP 91

Chartreuse

Pistachio* SP 95



Aquamarine SP 07

Pale Teal SP 07







Krypton SP 07

Deep Sea Blue* SP 07

Midnight Blue SP 07



Warm Grey

SP 76

FORMA

Pumice

SP 11

Beige

SP 04

Orange

SP 46

Olive*

SP 88

Lagoon*

SP 07



Cool Grey SP 36



Taupe Grey

SP 90

Sandstone SP 12



Scarlet* SP 93

Blush Pink SP 81



Moss* SP 89

Dark Turquoise

SP 07

Desert Sage SP 78

Azure* SP 07

FLOOR DIVIDERS

AKUSTUS.COM

Black

SP 13

Tangerine*

SP 92



Mid Grey SP 37



Castlerock* SP 80



Red SP 08



Graphite SP 03



Yam SP 28



Plum



SP 72



Purple

SP 50

Forest Green SP 17



Navy SP 07



Peacock SP 82



Jordy Blue* SP 07




Ocean Green*

SP 86

Sky Blue SP 07

Installation

Aluminum Base Plate

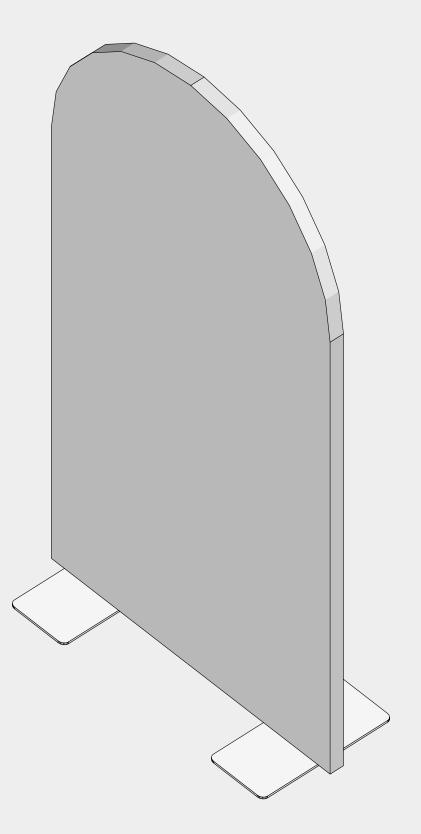

FLOOR DIVIDERS

AKUSTUS.COM

Product Specifications

Forma Floor Dividers

Composition

100% polyester fibre

Health & Safety

- Fire-rated
- ASTM E84 Class A
- CAN/ULC-S102.2-10 compliant
- Low VOCs
- CDPH v1.2 compliant
- Mould & mildew resistant
- ASTM C1338 compliant

Colour & Texture Variations

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

Sustainability


- 100% recyclable
- Made with 60% post consumer recycled content
- Declare Red List free
- Contributes to LEED certification
- Environmental Product Declaration



FORMA

Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

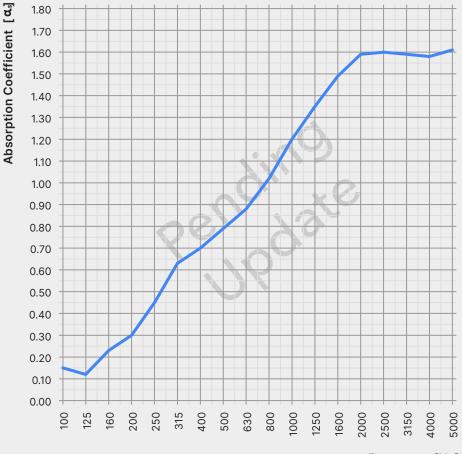

200	250	315	400	500	630	800	1000	1250	1600	2000	2500	NRC	SAA
0.30	0.45	0.63	0.70	0.79	0.88	1.02	1.20	1.35	1.49	1.59	1.60	1.00	1.00

FLOOR DIVIDERS

AKUSTUS.COM

Frequency [Hz]

Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products. FORMA





FLOOR DIVIDERS