AKUSTUS DESIGNS SCREENS INFO@AKUSTUS.COM AKUSTUS.COM

Leaf Confetti Screens








Falling leaves or drifting confetti?
Why not both? Regardless of
where you land, the Leaf Confetti
Screen's playful pattern is sure
to delight. Suspend a few to
divide up your space and foster
concentration in coworking
spaces or in university libraries.


How to Specify

Step by step instructions on how to specify <u>Leaf</u> <u>Confetti Screens</u>.









SCREENS

O1
Choose thickness. (pg 03)

Choose panel design and create your own configuration. (pg 03)

02

O3 Choose colour. (pg 04) O4
Choose installation method.
(pg 05-06)

03 LEAF CONFETTI SCREENS AKUSTUS.COM

Dimensions

Standard Dimensions (mm)

1220 W x 2745 H

Standard Thicknesses (mm)

12, 18, 24


Edge Detail





Square Edge

Customization

Width and Height can be customized to fit your space.

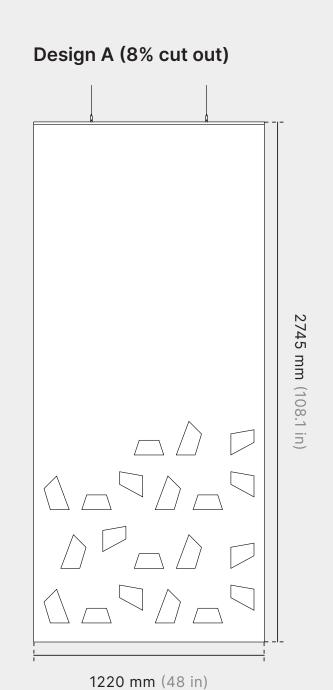

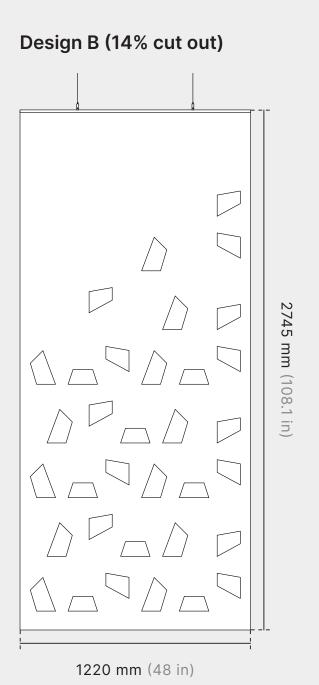

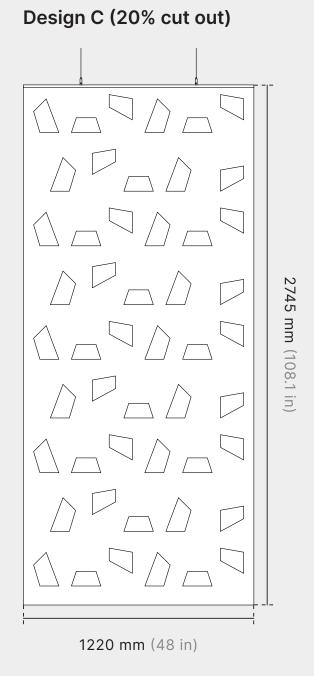

A K U S T U S

Standard Colours

Choose from any one of our standard colours.

Don't see something you love? Ask us about creating your own custom colour.

All colours available in 9, 12, 18, and 24 mm unless noted otherwise.

* 12 mm / 24 mm only



05 LEAF CONFETTI SCREENS AKUSTUS.COM

Installation Option 01


Aircraft Wire Suspension Kit

Each screen is suspended by its own set of aircraft wires.

No Hardware

(Alternative)

(Default)

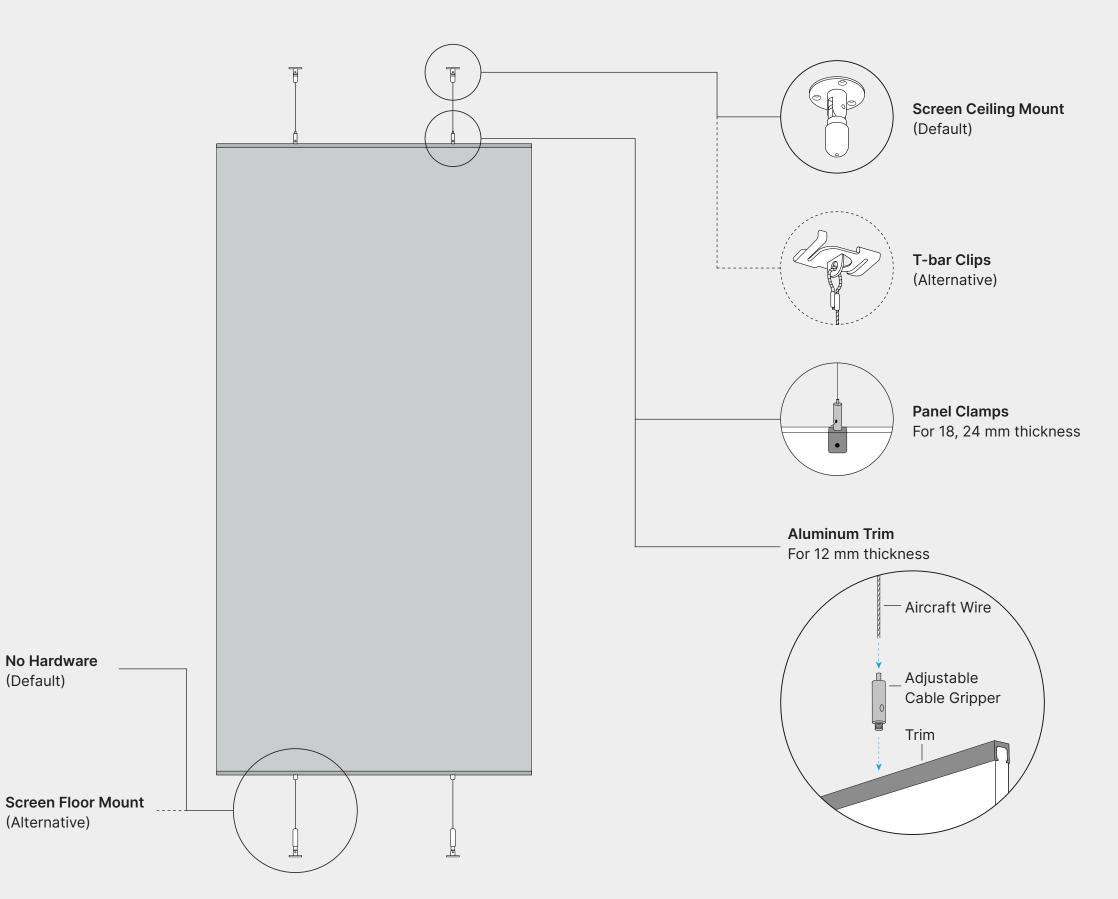


06 LEAF CONFETTI SCREENS AKUSTUS.COM

Installation Option 02

Sliding Track Suspension Kit

Screens are suspended from tracks mounted to the ceiling.

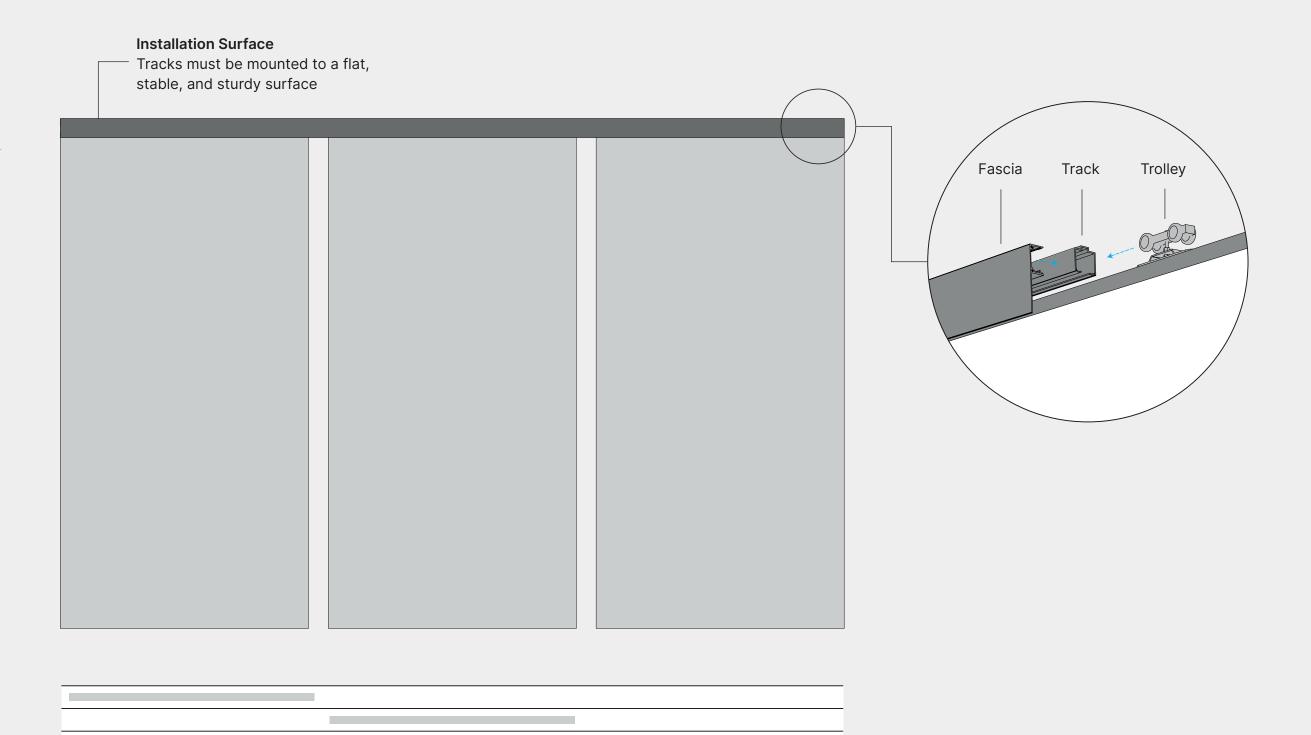

Top-Down View

Tracks can be installed in multiple rows to layer the screens

07

Sustainability

• 100% recyclable

LBC Red List free

off-gassing

Product Specifications

Leaf Confetti Screens

Composition

100% polyester fibre

VOC Emissions

CDPH (CA 01350)

Antimicrobial Testing

Mould & mildew resistant

Fire Rating

- ASTM E84 Class A
- CAN/ULC-S102.2-10



AKUSTUS

The felting and dyeing process

that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

Contributes to LEED certification

Free of toxic substances and of

from plastic water bottles

Colour & Texture Variations

• Made with ~60% recycled content

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

Sound Absorption Graph

LEAF CONFETTI



SCREENS

AKUSTUS.COM

	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	NRC	SAA
12 mm	0.43	0.48	0.59	0.71	0.85	0.92	0.93	0.96	0.94	0.94	0.93	0.93	0.80	0.80
18 mm	0.28	0.34	0.48	0.64	0.79	0.96	1.03	1.05	0.99	0.98	0.94	0.92	0.80	0.78
24 mm	0.58	0.68	0.85	0.94	1.00	1.00	1.06	1.04	1.05	1.02	1.04	1.04	0.95	0.94

Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt.
Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.



SCREENS