

AKUSTUS DESIGNS INFO@AKUSTUS.COM AKUSTUS.COM

Carton Baffles

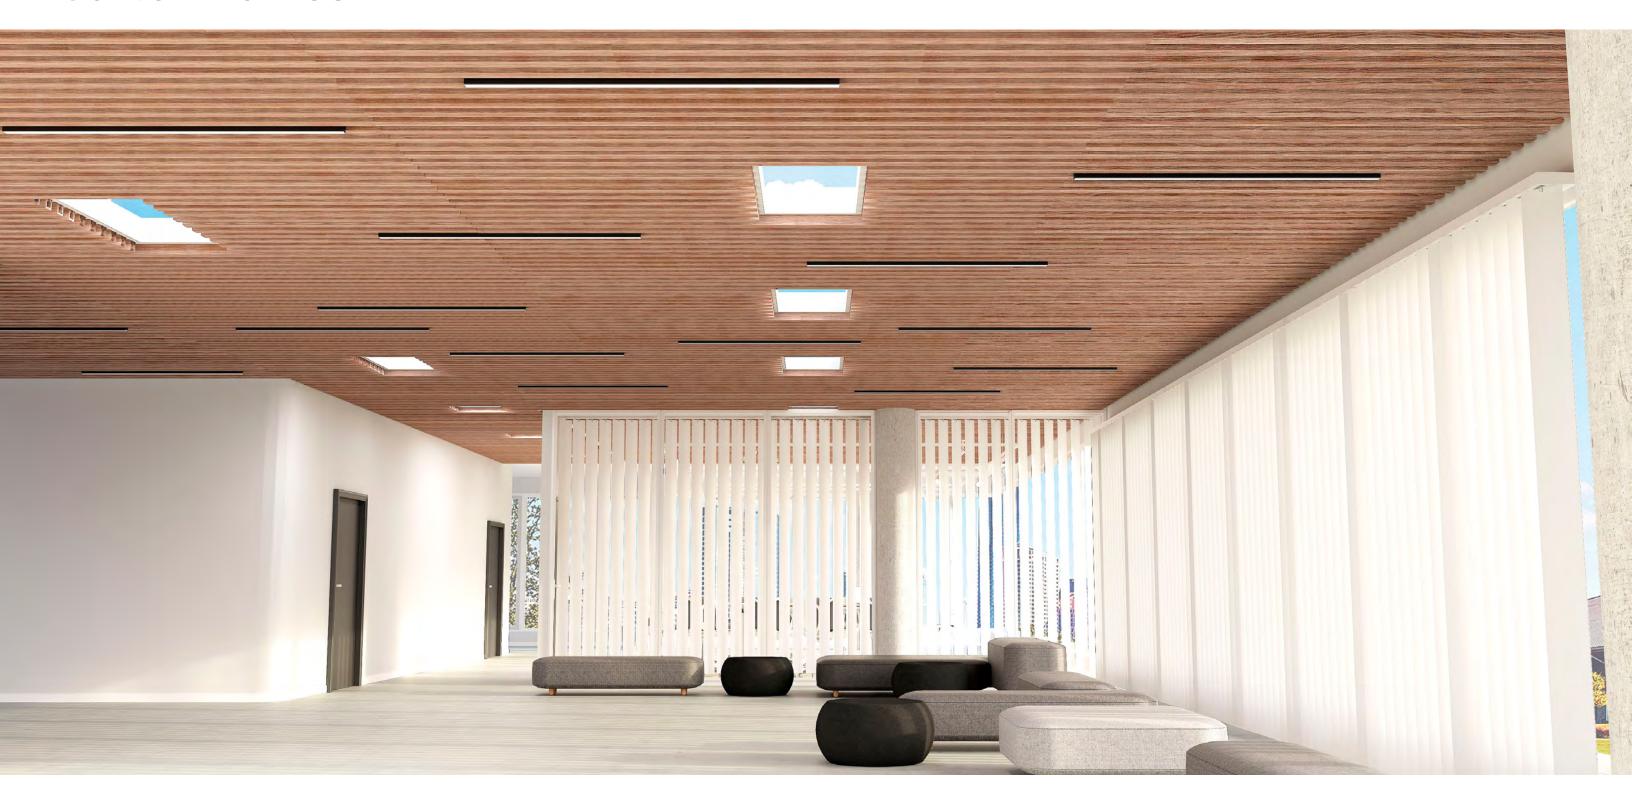


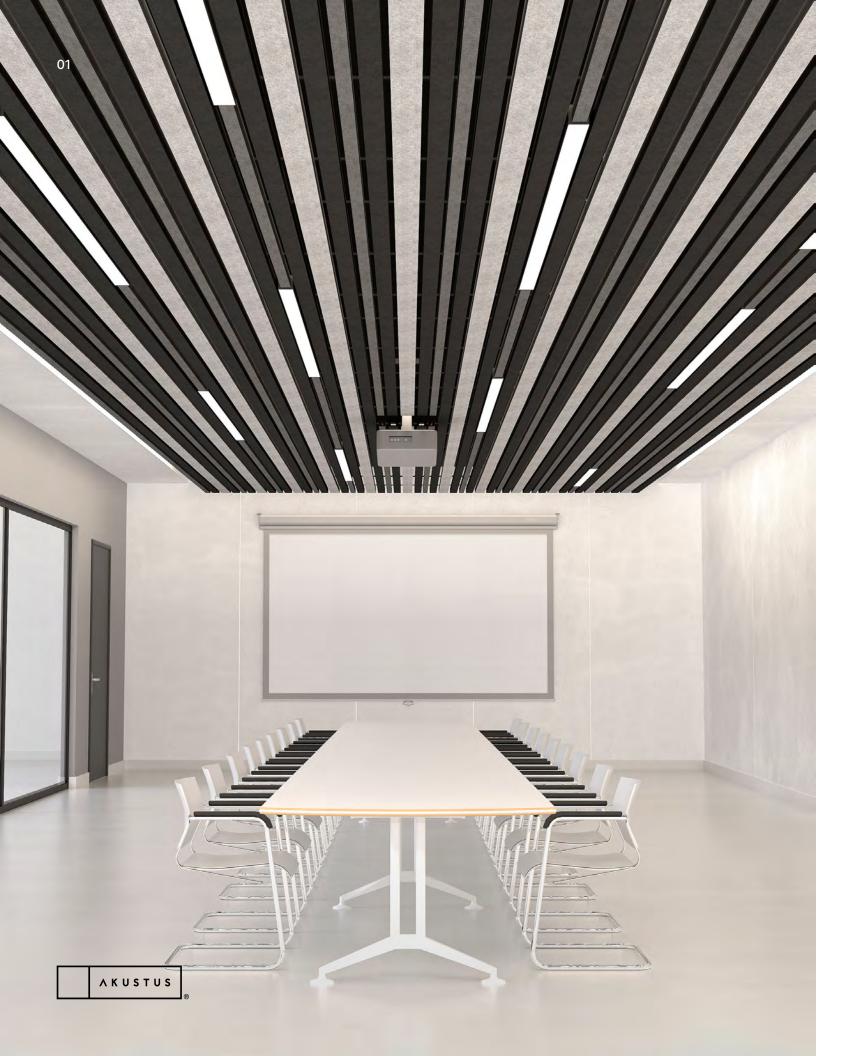



Whatever their orientation or arrangement,
Carton Baffle's lines lead to more
peaceful soundscapes and more stunning
environments. The system's aluminum
frame comes equipped with baffle hooks
so that installing the baffles is as easy as
just pushing them onto the frame. With
Carton Baffles covering the ceiling, you
can elevate the atmosphere of any room.

How to Specify


Step by step instructions on how to specify <u>Carton</u> <u>Baffles</u>.








CARTON





01

Choose baffle dimensions. (pg 03)

02

Choose baffle spacing. (pg 04)

03

Choose configuration or create your own.
(pg 04)

04

Choose colour or texture. (pg 05-06)

05

Choose installation method. (pg 07)

03 CARTON BAFFLES AKUSTUS.COM

Dimensions

Carton Baffle comes in 3 standard sizes.

Standard Dimensions (mm)

- 50 W x 50 H
- 75 W x 50 H
- 100 W x 50 H

Edge Detail




Box Edge


Customization

Length and Height can be customized to fit your space.

Design A




Design B





75 mm (3 in)


Design C



100 mm (3.9 in)

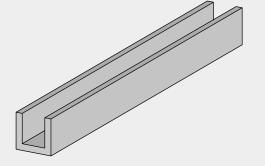

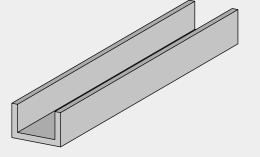

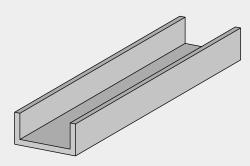


04 CARTON BAFFLES AKUSTUS.COM

Configurations

Vary baffle sizes and spacing to create a dynamic look.

Standard



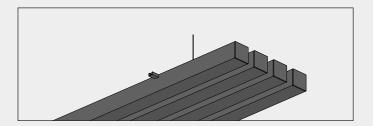

Standard Spacing Options


25 mm

50 mm

Spacing measured from edge to edge. Custom spacing available.


Config 1



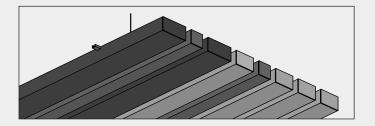


Config 2



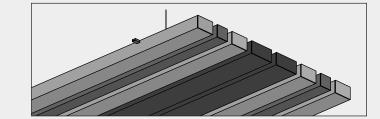

Config 3



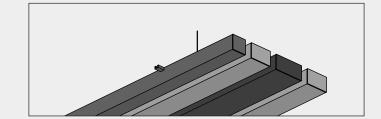

Standard Colours

Choose from any one of our standard colours.

Don't see something you love? Ask us about creating your own custom colour.

All colours available in 9, 12, 18, and 24 mm unless noted otherwise.

* 12 mm / 24 mm only



06 CARTON BAFFLES AKUSTUS.COM

Textures

Create a natural look and feel with printed textures.






Silver Oak



Greige Oak



Ebony Oak

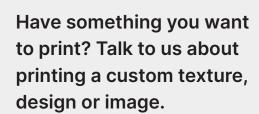



Cafe Oak



Golden Oak




Teak




Walnut

07 CARTON BAFFLES AKUSTUS.COM

Installation



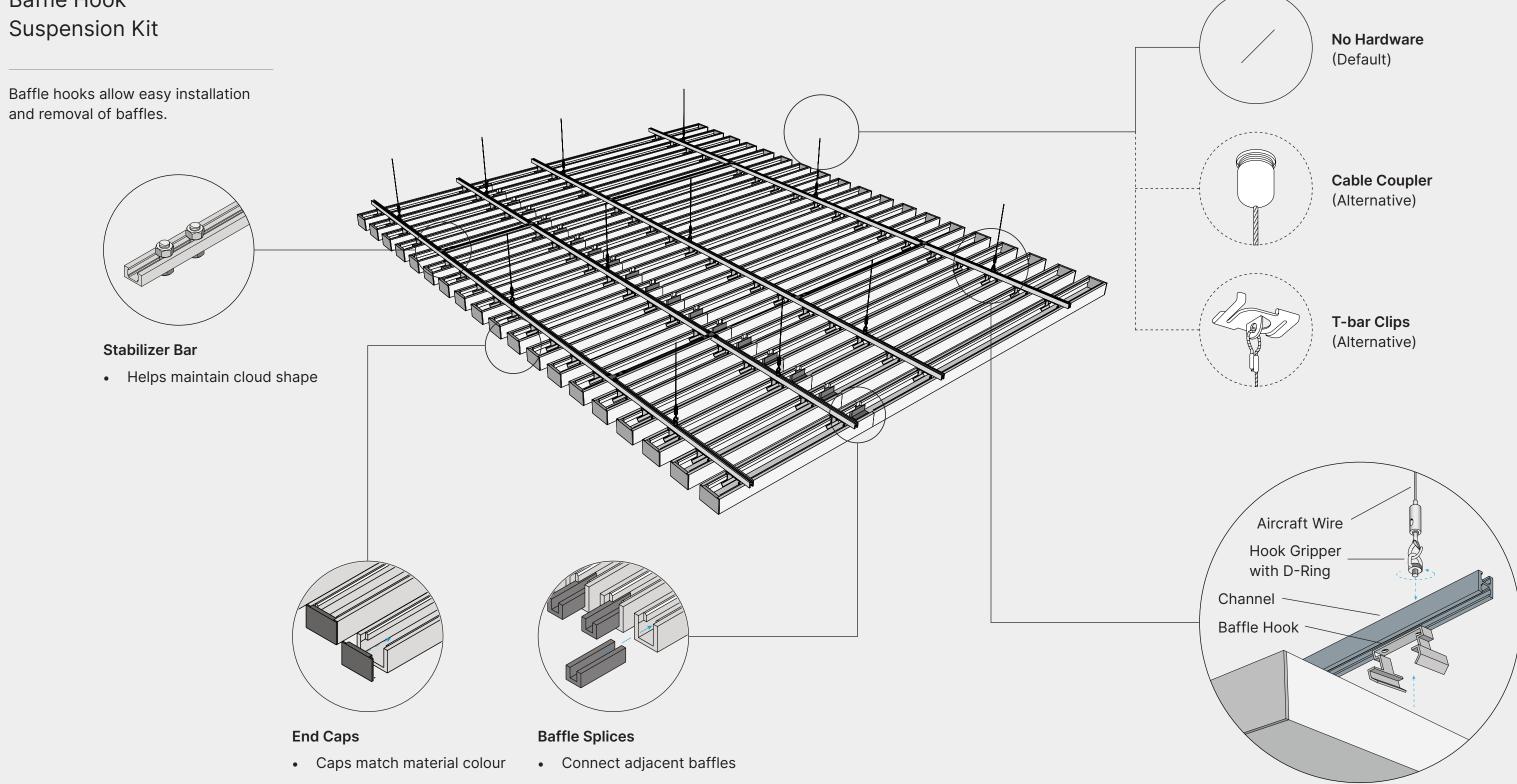

80

Product Specifications

Carton Baffles

Composition

100% polyester fibre

VOC Emissions

CDPH (CA 01350)

Antimicrobial Testing

Mould & mildew resistant

Fire Rating

- ASTM E84 Class A
- CAN/ULC-S102.2-10



AKUSTUS

Sustainability


- 100% recyclable
- LBC Red List free
- Contributes to LEED certification
- Free of toxic substances and of off-gassing
- Made with ~60% recycled content from plastic water bottles


Colour & Texture Variations

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

Sound Absorption Graph

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

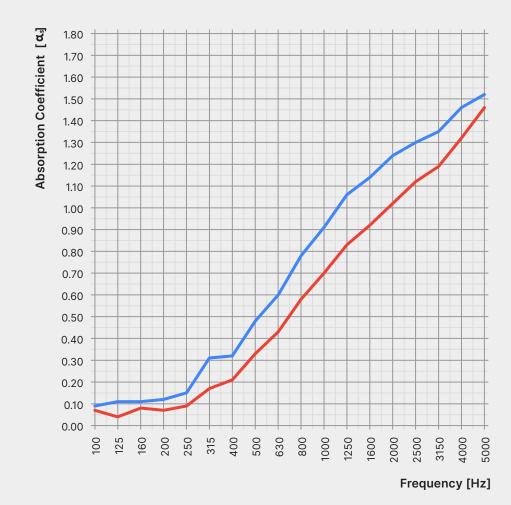



Edge to Edge Spacing 50 mm

	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	NRC	SAA
Spacing 25 mm	0.12	0.15	0.31	0.32	0.48	0.60	0.78	0.91	1.06	1.14	1.24	1.30	0.70	0.70
Spacing 50 mm	0.07	0.09	0.17	0.21	0.33	0.43	0.58	0.70	0.83	0.92	1.02	1.12	0.55	0.54

Product Care

Handling & Storage

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt. Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

