
AKUSTUS DESIGNS INFO@AKUSTUS.COM AKUSTUS.COM

# **Valley Baffles**




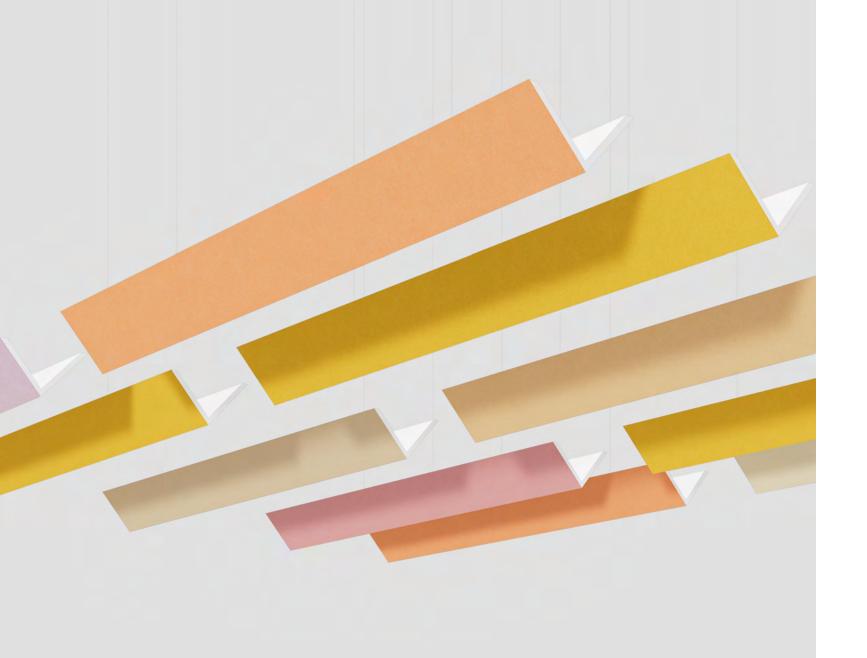



The dips and slopes of Valley Baffle create fascinating visuals from no matter which angle you view them from. While the panel material absorbs excess sound energy, the slanted faces of the baffle cause sound waves to reflect and diffuse more evenly within the room. Let Valley help you create a room that's wonderful to be in and to look at.


# **How to Specify**

Step by step instructions on how to specify <u>Valley</u> Baffles.









01

Choose baffle size.

(pg 03)

02

Choose baffle spacing.

(pg 04)

03

VALLEY

Choose colour.

(pg 05)


04


**Choose installation** method.

(pg 06-07)

# **Dimensions**

# Design A



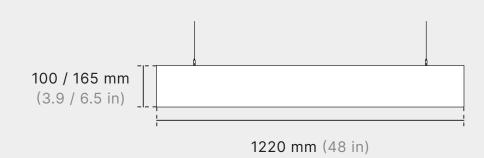


## **Standard Dimensions (mm)**

200 W x 1220 L x 100 H 200 W x 2440 L x 100 H

200 W x 2745 L x 100 H

330 W x 1220 L x 165 H


330 W x 2440 L x 165 H 330 W x 2745 L x 165 H



**Design B** 


# Medium

**Small** 

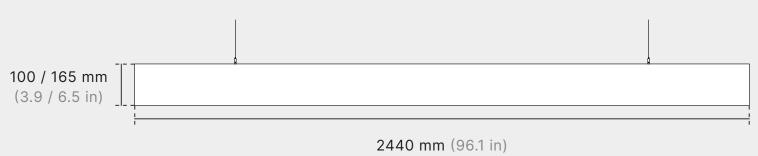

## Customization

Width, Length, and Height can be customized to fit your space.

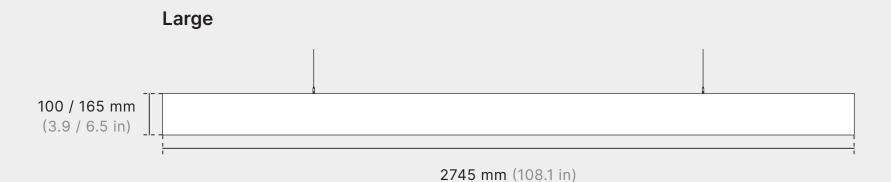


**AKUSTUS** 


# **Spacing**

Valley Baffles in a cloud configuration makes installation a breeze.
Choose from the following standard spacing options.


305 mm Spacing (O.C.)

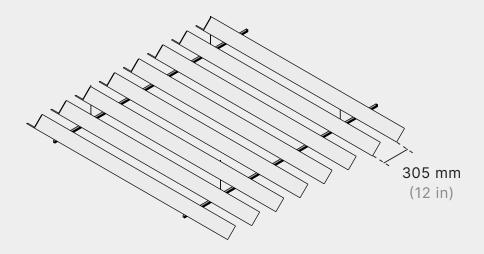

407 mm Spacing (O.C.)

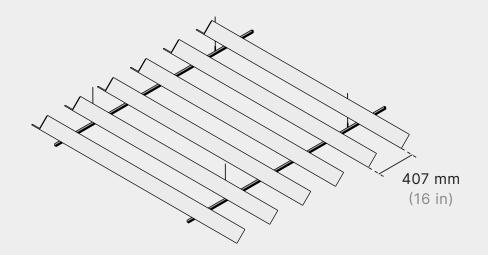

# 488 mm Spacing (O.C.)

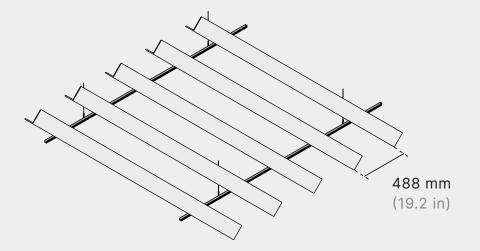

## Customization

Custom spacing available.

# **Standard Colours**

Choose from any one of our standard colours.

Don't see something you love? Ask us about creating your own custom colour.

All colours available in 9, 12, 18, and 24 mm unless noted otherwise.

\* 12 mm / 24 mm only




# Installation Option 01

Baffle Cloud Suspension Kit

Baffles are attached to channels and suspended in an array.


- Reduces the number of hanging points on the ceiling
- Hanging points can be moved along the channels

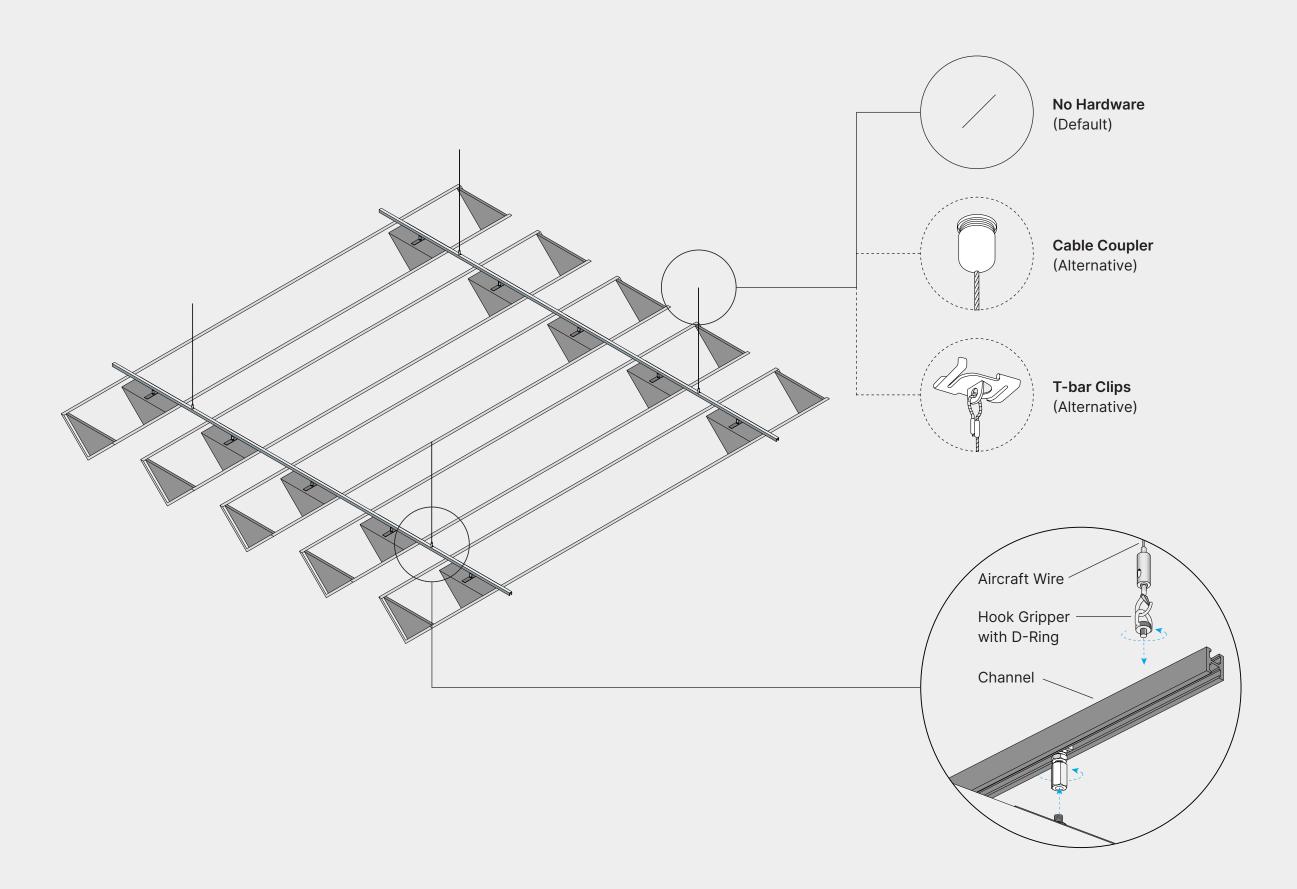

# Installation Option 02

Individual Baffle Suspension Kit

Each baffle is suspended by its own set of aircraft wires.

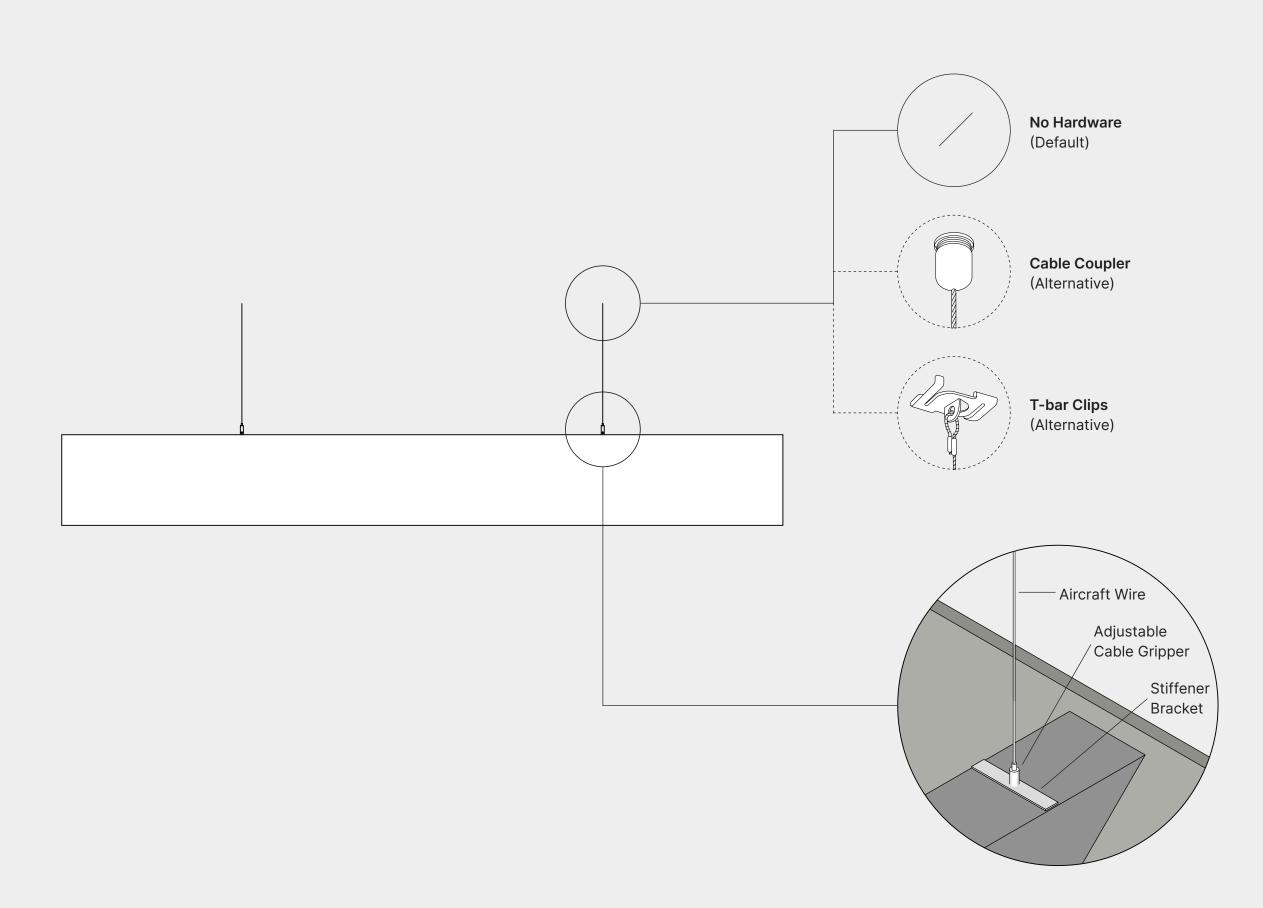

80

# **Product Specifications**

# Valley Baffles

### Composition

100% polyester fibre

#### **VOC Emissions**

CDPH (CA 01350)

## **Antimicrobial Testing**

Mould & mildew resistant

### **Fire Rating**

- ASTM E84 Class A
- CAN/ULC-S102.2-10



**AKUSTUS** 

## Sustainability

- 100% recyclable
- LBC Red List free
- Contributes to LEED certification
- · Free of toxic substances and of off-gassing
- Made with ~60% recycled content from plastic water bottles


#### **Colour & Texture Variations**

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

VALLEY **BAFFLES**  **AKUSTUS.COM** 

# **Sound Absorption Graph**

The following values reflect the acoustic properties of the product as tested in accordance with ASTM C423-09a.

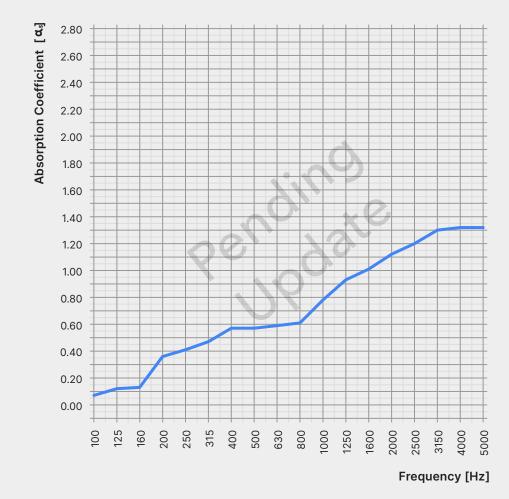

630 800 1000 1250 1600 2000 2500 NRC SAA 250 315 400 500 200 0.41 0.47 0.57 0.57 0.59 0.61 0.78 0.93 1.01 1.12 1.20 0.70 0.72

# **Product Care**

## **Handling & Storage**

Handle products with care so as to avoid folding the polyester felt, chipping its edges, or indenting its faces. Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation. Allow products to acclimatize to environmental conditions. Lay them flat on their faces; do not stand them on their edges. Protect from moisture, heat, direct sunlight, and the elements.

## Warranty

AKUSTUS warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.

#### Maintenance

Lightly brush or gently vacuum to remove dust from polyester felt.
Clean with warm water and mild, non-toxic soap to remove spills. Test solution on an inconspicuous spot before applying to more visible areas. Blot with a dry cloth after applying the solution to avoid saturating the material. Avoid applying too much pressure when cleaning the products.

